

ARS 12L35 727 ENR CL BS 3550 CL2 W5 T60 GY



Aerie

A discreet, post top LED lantern with a timeless design. LED driver for 12 LEDs, driven at 350mA with Extra Narrow Road distribution. Class II electrical, IP66, IK10. Canopy and base: corrosion resistant die-cast powder coated aluminium suitable for C5 environments, finished textured grey. Enclosure: slim UV stabilised polycarbonate with clear finish. BSxyz: Autonomous, physically disconnectable, bi-power reduction (x: hours before midnight, y: hours after midnight, zz: reduction (%)) Complete with 2700K LED. Post top mounting to Ø60mm column. Pre-wired with 5m cable.


Dimensions: Ø602 x 586 mm
 Luminaire input power: 14 W
 Luminaire luminous flux: 1639 lm
 Luminaire efficacy: 117 lm/W
 Weight: 10.99 kg
 Scx: 0.172 m²



TLG_AERI_F_S_CL.jpg



TLG_AERI_M_T60_S.wmf

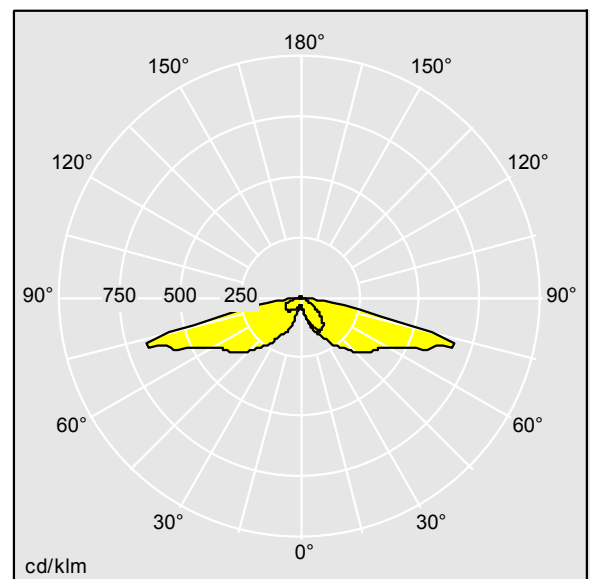

Light Source: LED
 Luminaire luminous flux*: 1639 lm
 Luminaire efficacy*: 117 lm/W
 Colour Rendering Index min.: 70
 Ballast: 1 x 87500877 LCO 40/200-1050/64 NF C
 ADV3

Correlated colour temperature*: 2700 Kelvin
 Chromaticity tolerance (initial MacAdam): 5
 Rated useful life (B10)*: L90 100000h at 25°C
 Luminaire input power*: 14 W Power factor = 0.97
 Dimming: PROG
 LOR: 1,00 ULOR: 0,01 DLOR: 0,99

This product contains a light source of energy efficiency class E.